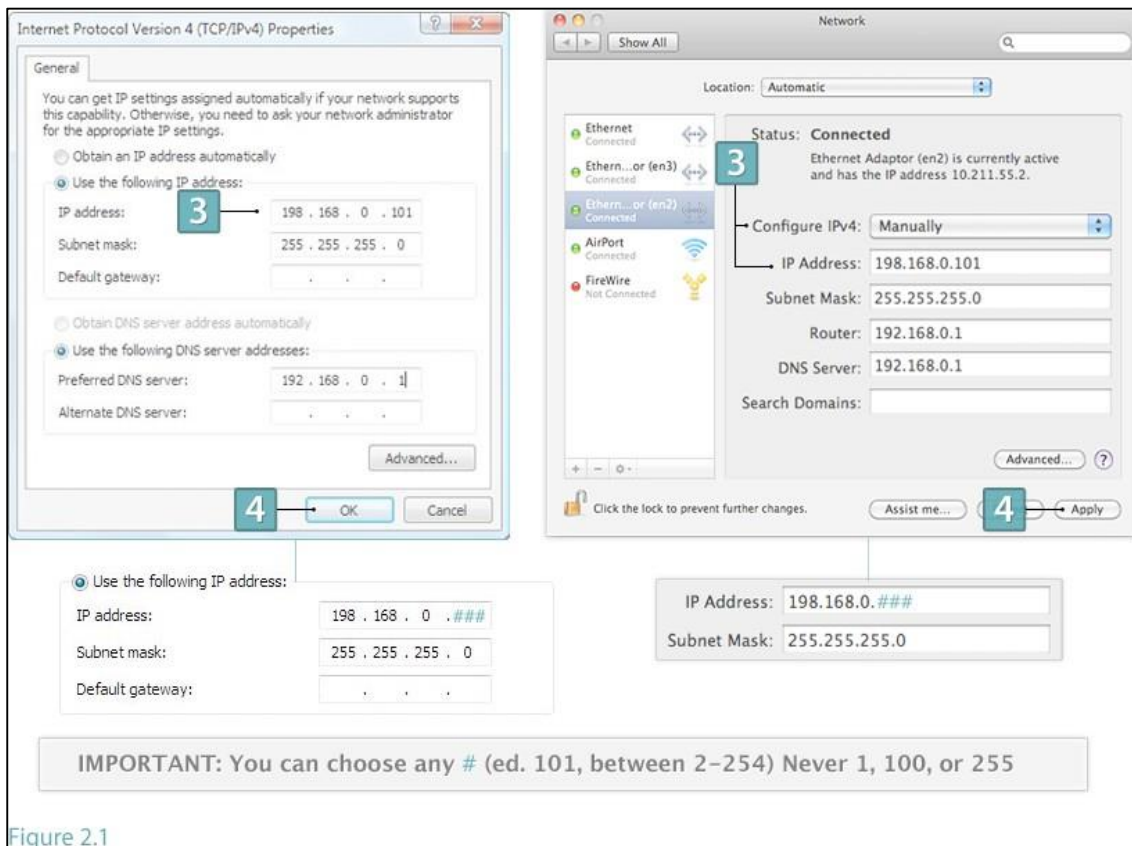# Hardware MediaBridge

Configuration

1. Plug Crossover/Ethernet cable into Port #1 of MediaBridge and then plug the other end into your PC/Mac.

2. Plug power cord into the MediaBridge, and then plug the other end into wall outlet.

3. In your network configuration tab, manually assign your IP Address to 192.168.0.101. *(You have the option to choose any # between 2 and 254, but never 1, 100 or 255.)*

Figure 2.1

4. See Figure 2.1.

5. Select Apply/OK to activate settings to establish the connection between your MediaBridge and PC/Mac.

6. Login to MediaBridge IP Address http://192.168.0.100. (Username = admin, Password = default.)

7. Click "Edit IP Configuration." Update the following:

- o IP Address
- o Subnet Mask
- o Gateway
- o DNS1

Hardware MediaBridge Configuration

8. Choose "Save," and then reboot the machine.

9. Disconnect the MediaBridge from laptop & connect to your network.

10. When device is powered on again, access web interface at applied IP Address. (Username = admin, Password = default.)

11. Click "Edit Account Information."

12. Update the following:

- o Account ID (*Your account ID is the text that appears between http:// and .channelshd.com in your account's URL. For example, http://industryweapon.channelshd.com. Industry Weapon would be the account ID.*)

- o Account PIN (from the Configuration page of CCHD)

- o Zone ID (from the Configuration page of CCHD)

- o Timezone

13. Reboot again. Your MediaBridge should now be configured to communicate with CCHD.